

AWAYWASH Safety Instructions




Place main chute above the tank for transport



Do not use if the unit is damaged or incomplete



Always secure hose up for transport

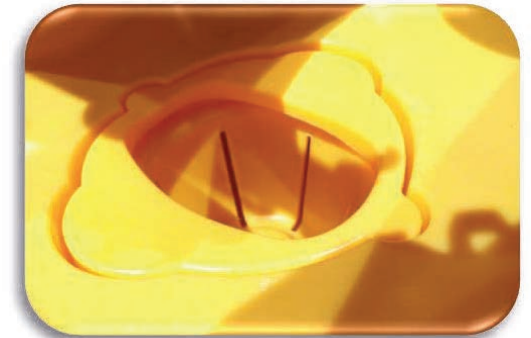

The sieve must be in the tank to transport liquids*



Do not step or stand on AWAYWASH



Wear appropriate PPE

AWAYWASH (CCRT)



AWAYWASH MKII (CCRT2)



Spare parts available
www.AWAYWASH.com

**The sieve acts as a baffle to the liquid contained in the tank, preventing spillage during transit.*

AWAYWASH User Guide



Secure the hose up

Check the sieve is in the tank

Place the chute(s) above AWAYWASH

Wash the chute(s) as normal



Empty coarse aggregate from sieve

Replace the sieve in the tank

Drive back to batching plant

Back truck up to settlement pit



Unfasten and lower the hose to empty the tank (gravity fed emptying)

Flush tank with water hose to remove silt residue

Before going back on the road: fasten the hose back up.

At end of shift: leave hose down to prevent rainwater build up and frost damage