

# AWAYWASH Safety Instructions



Place main chute above the tank for transport



Do not use if the unit is damaged or incomplete



Always secure hose up for transport




The sieve must be in the tank to transport liquids\*



Do not step or stand on AWAYWASH



Wear appropriate PPE

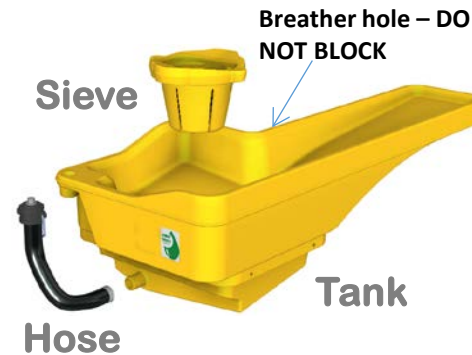

Spare parts available  
(hose - sieve - tank)  
[www.AWAYWASH.com](http://www.AWAYWASH.com)



*\*The sieve acts as a baffle to the liquid contained in the tank, preventing spillage during transit.*

# AWAYWASH User Guide



1

Secure the hose up



2

Check the sieve is in the tank



3

Place the chutes above AWAYWASH



4

Wash the chutes as normal



5

Empty coarse aggregate from sieve



6

Replace the sieve in the tank



7

Drive back to batching plant



8

Back truck up to settlement pit



9

Unfasten and lower the hose to empty the tank (gravity fed emptying)



10

Flush tank with water hose to remove silt residue



11

Before going back on the road: fasten the hose back up.



12

At end of shift: leave hose down to prevent rainwater build up and frost damage